

Figure 1 (PRIOR ART)

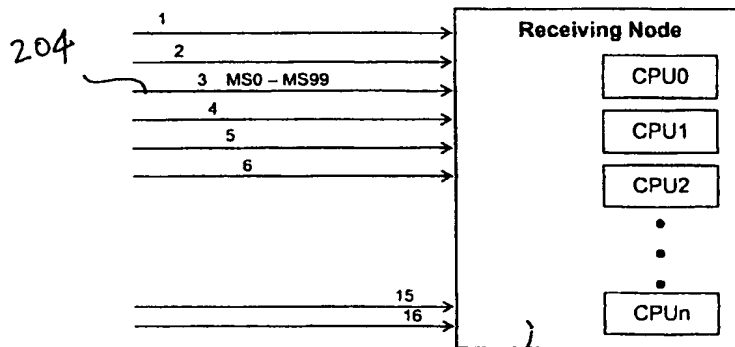


Figure 2  
(PRIOR ART)

$$\text{CPU to receive message} = \text{MOD}_{(\# \text{ of CPUs to be load-distributed})} (\text{SLS} + \text{OPC})$$

Figure 3

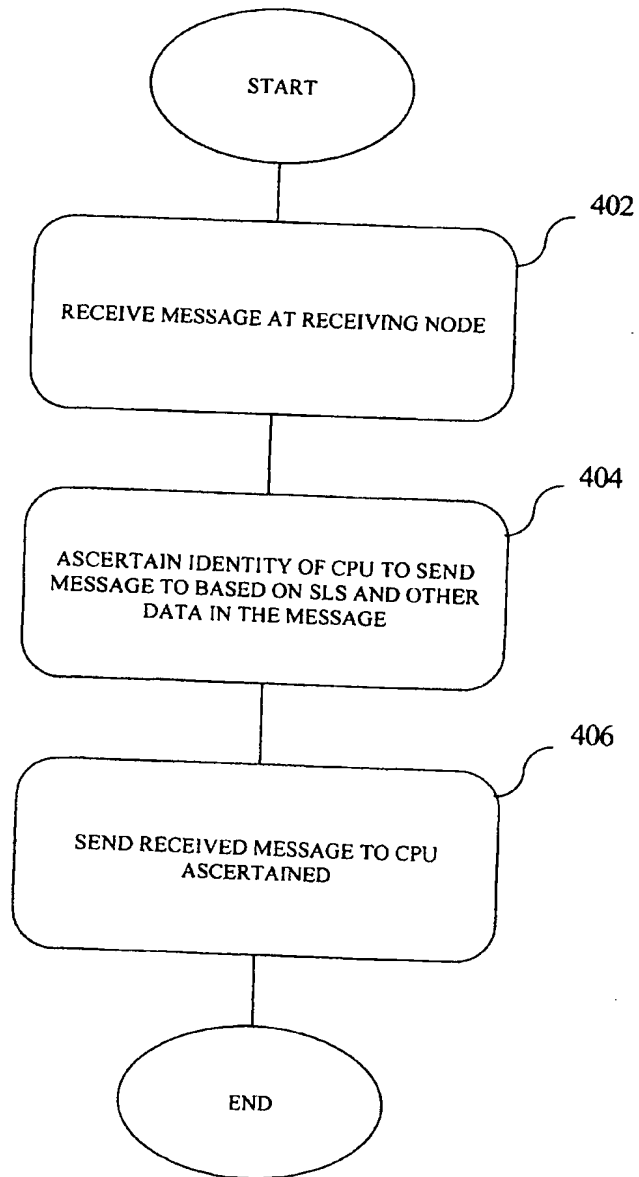


Figure 4